


RESILIENT MODULUS TEST DATA

SUMMARY REPORT

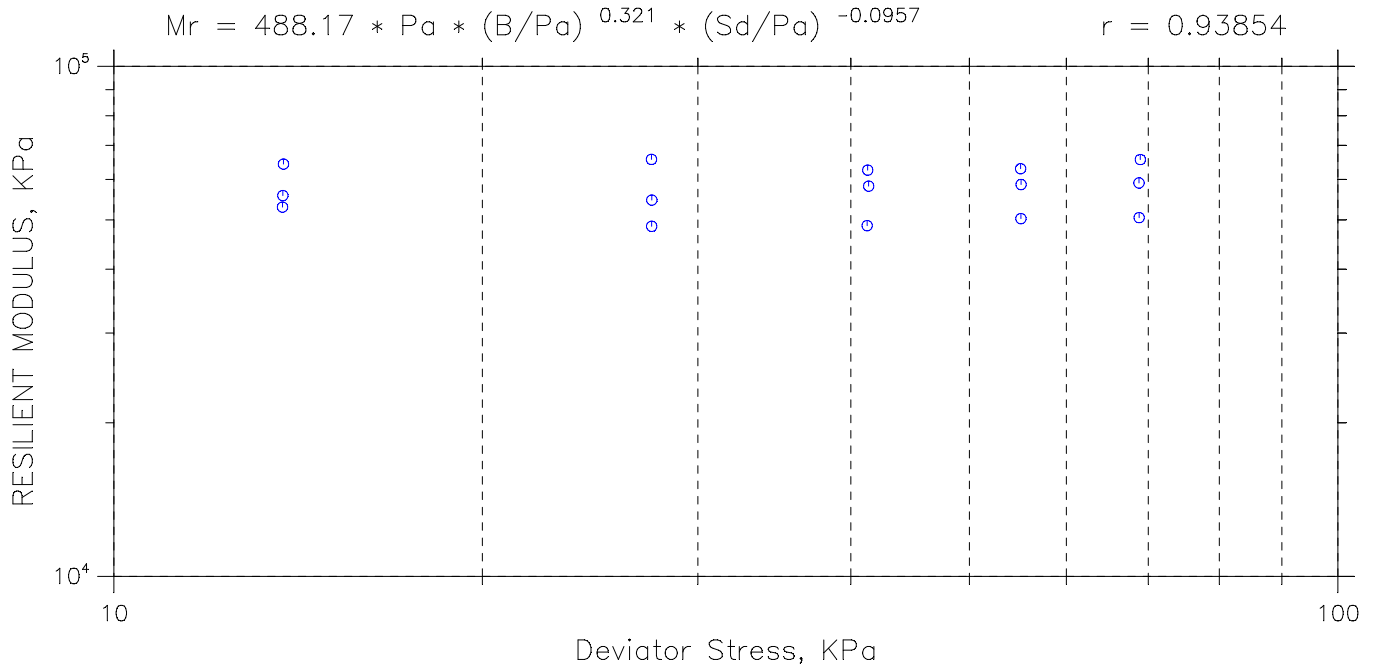

Confining Stress S3 (KPa)	Nom. Max. Deviator Stress (KPa)	Mean Deviator Stress (KPa)	Std. Dev. Deviator Stress (KPa)	Mean Bulk Stress (KPa)	Mean Resilient Strain (%)	Std. Dev. Resilient Strain (%)	Mean Resilient Modulus (KPa)	Std. Dev. Resilient Modulus (KPa)
40.52	13.79	13.76	0.0408	135.3	0.02	0.00	64307	2659.5
40.75	27.58	27.49	0.1390	149.7	0.04	0.00	65696	2604.9
40.33	41.37	41.29	0.0901	162.3	0.06	0.00	62595	1870.6
40.56	55.16	55.05	0.0680	176.7	0.08	0.00	62991	1752
40.91	68.95	68.96	0.1231	191.7	0.10	0.00	65648	694.69
26.93	13.79	13.74	0.0877	94.52	0.02	0.00	55802	4990.9
27.16	27.58	27.51	0.1062	109	0.05	0.00	54674	564.44
26.76	41.37	41.36	0.0933	121.6	0.07	0.00	58223	1414.6
26.97	55.16	55.1	0.1190	136	0.09	0.00	58636	790.29
27.2	68.95	68.78	0.1244	150.4	0.11	0.00	59070	1377.5
12.85	13.79	13.73	0.0549	52.28	0.03	0.00	52963	2864.8
13.38	27.58	27.5	0.0841	67.63	0.05	0.00	48567	731.94
13.24	41.37	41.25	0.0514	80.96	0.08	0.00	48712	1185.3
13.12	55.16	55.08	0.1062	94.45	0.10	0.00	50285	277.8
13.02	68.95	68.8	0.1362	107.9	0.13	0.00	50507	1355.5

Project: RM Test	Location: Boxborough, MA	Project No.: ABC
Boring No.: ---	Tested By: rh	Checked By: skw
Sample No.: S-1	Test Date: 00/00/2001	Depth:
Test No.: RM1	Sample Type: Shelby Tube	Elevation:
Description: Red brown silty caly		
Remarks: SUBGRADE: Type II		
File: D:\helpbackup\rm\rm.dat		