

California Bearing Ratio LoadTrac II

Benefits and Features

- Choose capacity to fit user needs from 45 and 90 kN (10,000 and 20,000 lbs.) models
- Total automation of data collection and reporting of test results
- Prepare tables and plots of report quality within minutes of completing a test
- Generate columns of data for easy reduction using your own spreadsheet software
- Ability to access and control the unit over a computer network using Geo-Net option

Applicable Test Standards

- ASTM D1883
- AASHTO T193 Standard Method for CBR (California Bearing Ratio) of Laboratory-Compacted Soils


The LoadTrac II loadframe provides compression/extension testing for a number of geotechnical tests that must have accurate control of the rate of displacement during loading. With accessories, the unit can perform CBR, unconfined compression and triaxial shear phase testing.

The base unit includes a stepper motor, lead screw, vertical tension rods and crosshead, displacement transducer, electronic controls and network communications.

Versions of the unit are available to test loads up to 90 kN (20,000 lbs.). Displacement rates can be set to any value between 0.00003 and 15 mm/min (0.000001 to 0.6 in./min). CBR displacement rate is set through software at 1.27 mm/min (0.05 in./min) in accordance with ASTM D1883.

The base unit can run in stand-alone mode without a computer. It includes built-in data acquisition and display capability. Sensor readings are displayed in SI or English units and stored in memory.

Optional software running in Windows® completely automates the test, reducing the data and preparing test results.

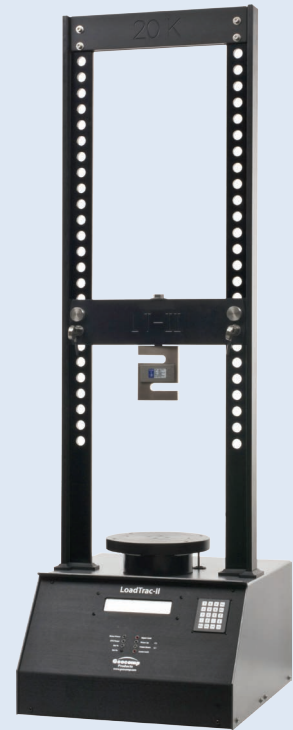

Standard Fully Automated
California Bearing Ratio System

