


# UNCONFINED COMPRESSION LOADTRAC II

The LoadTrac II load frame performs unconfined compressive strength testing under fully automated control with convenient remote monitoring and instant test results. The unconfined compression test allows you to quickly measure the compressive strength for cohesive soils and is a core offering for most laboratories. Once a soil sample is in place, and the test conditions selected, the system will run the entire test from start to finish.

- **Load capacity of 45 kN (10 klbf) or 90 kN (20 klbf)**
- **Unmatched automation from test start to finish** - 2 to 32 times faster results and labor time savings of 30% to 95% vs. manual testing
- **Flexible design** - perform additional testing on the same platform and save money and space in your lab
- **Full test control and remote monitoring allows you to take your testing on the go** - view real-time results, check test quality, and change parameters
- **Convenient reporting** - produce complete, compliant reports instantly or export data for desired manipulation
- **Designed for consistent and repeatable testing you can be confident in**

## Applicable Test Standards

- ASTM D1663, D2166
- AASHTO T208

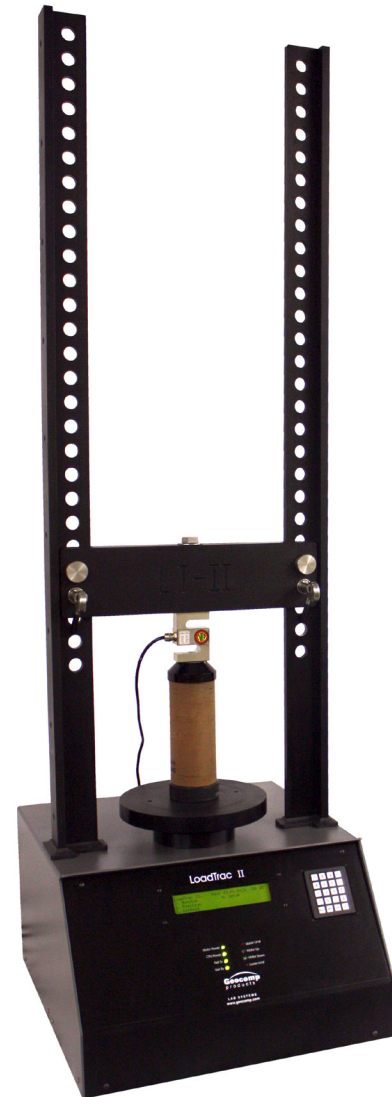

Standard Unconfined Compression System

# UNCONFINED COMPRESSION LOADTRAC II

## TECHNICAL SPECIFICATIONS

### LOAD CAPACITY

45 (10 kLbf) or 90 kN (20 kLbf)

### MOTOR

Micro-stepper system with built-in controls

### RATE OF DISPLACEMENT

0.00003 to 25 mm per minute  
(0.000001 to 1.0 in per minute)

### TRAVEL

Built-in displacement transducer with 76 mm (3 in) range and 0.0013 mm (0.00005 in) resolution

### POWER

110/220 V, 50/60 Hz, 1 phase

### DIMENSIONS

464 x 546 x 1206 mm (18 x 21.5 x 47.5 in)

### WEIGHT

55 kg (120 lbs)

### INCLUDED

- Geo-NET network card and cable to link to PC
- UC software module to automatically run and report tests


### ACCESSORIES

- UC.REPORT: editing/reporting software for multiple tests


### WARRANTY

- 12 month warranty; extended warranties available


## Typical Test Output (example)

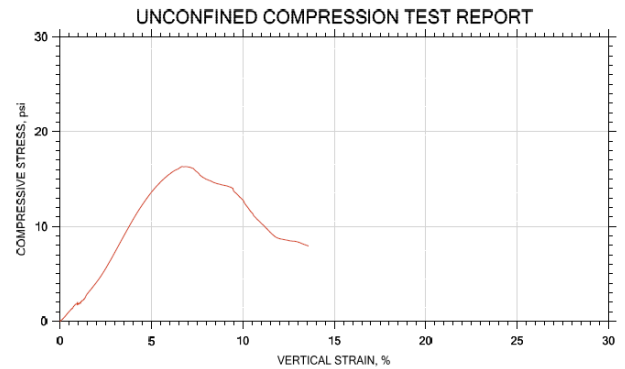

Symbol				
Test No.	UC-1			
Diameter, in	2.87			
Height, in	5.98			
Water Content, %	25.00			
Dry Density, pcf	95.80			
Saturation, %	88.87			
Void Ratio	0.76			
Unconfined Compressive Strength, psi	16.34			
Undrained Shear Strength, psi	8.169			
Time to Failure, min	8.3409			
Strain Rate, %/min	1			
Estimated Specific Gravity	2.70			
Liquid Limit	41			
Plastic Limit	22			
Plasticity Index	19			
Failure Sketch				

	Project: XYZ Bridge	Location: Anywhere, USA	Project No.: GTX-0000
	Boring No.: B-1	Tested By: MD	Checked By: JDT
	Sample No.: S-1	Test Date: 02/15/2018	Elevation: --
	Test No.: UC-1	Preparation: Tube	Depth: 10-12 ft
	Description: Moist, grey clay		
Remarks: System A.			

## User Friendly Interface

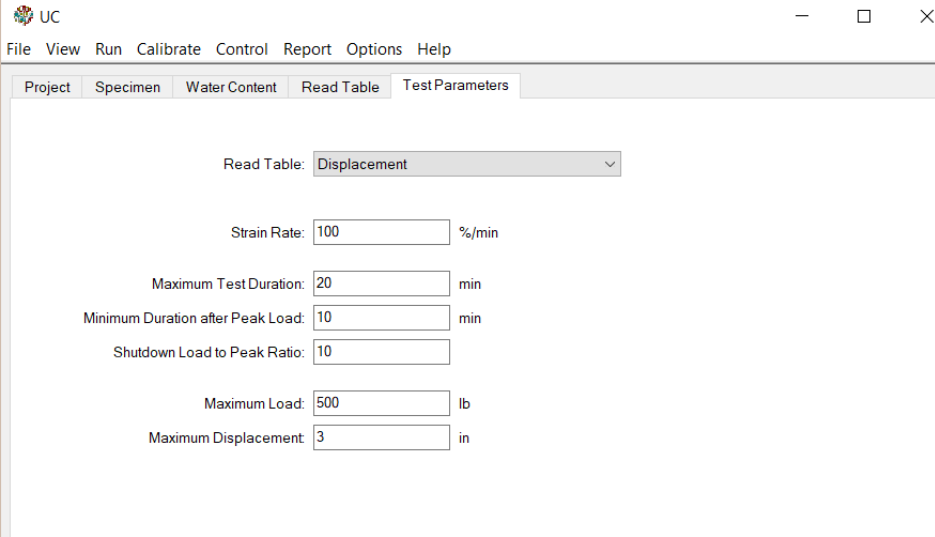

UC

File View Run Calibrate Control Report Options Help

Project Specimen Water Content Read Table Test Parameters

Read Table:

Strain Rate:  %/min

Maximum Test Duration:  min

Minimum Duration after Peak Load:  min

Shutdown Load to Peak Ratio:

Maximum Load:  lb

Maximum Displacement:  in